


VISIONZ
Of An Office




Under Cabinet And Millwork

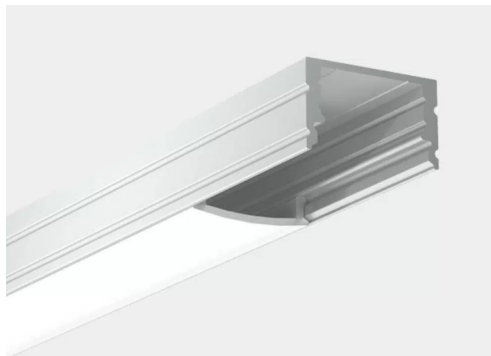

1200 Series - LumenTruss

Lighting without hot spots! Here is a profile designed to ensure that the LED source is invisible, offering uniform and soft lighting for the eyes. A compact and versatile luminaire!

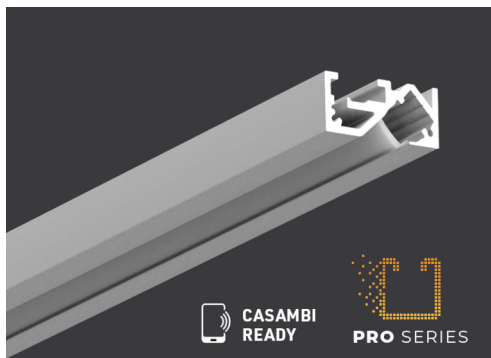

4260 Series - LumenTruss

A new compact profile has been added to this thin series! Profile 4260 provides accent lighting at an angle of 53° to highlight products on shelves or to cut out the underside of cabinets. Even better, the phantom brackets perfectly conceal the surface installation. Ideal for commercial or residential applications.




Perimeter/Cove Lighting



PUR-LED - PMC Lighting

The E3095-pūr-led™ is constructed from an extruded aluminum housing combined with internal components made from die formed cold rolled steel to create direct wall grazing distribution.

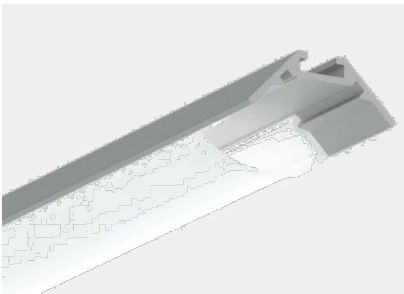

2400 Series - LumenTruss

Offering lighting without hot spots at a 45-degree angle from a corner, this series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style. This profile includes a long lens fitting system to maximize its long term durability. With a type A mounting channel in the back, you can easily join multiple sections with a type A straight joiner or use it to pass and hide the wiring behind the profile.



L6PER - Mojo Illumination


The L6PER recessed mounted perimeter direct linear LED Luminaire is a slim rectilinear profile suitable for individual or continuous row mounting. Diffuse Lambertian, Asymmetric and Wall Graze Distributions and available in 2" or 3" nominal aperture sizes.




OMEGA TRIMLESS KIT - MODERN & STUNNING

AN INSTANT CLASSIC

The Omega trimless kit is our new favorite LED Recessed luminaire! Minimalist with the newest in technology. The kit is available in silver, white or black. One of the advantages is that it is designed to be plastered into ceilings to give a seamless appearance. A great choice to get a clean and modern look.

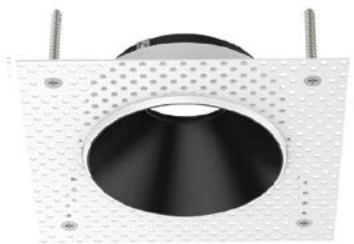

Kit Trimless Black

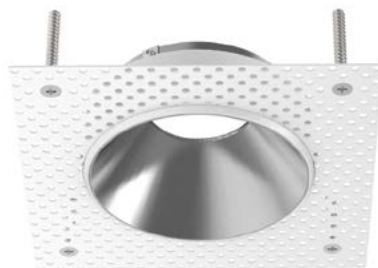

Kit Trimless Silver



Kit Trimless White



Cylinder Surface/Pendants




Cylinders Series - U-Technology

Introducing the Rhythm Series LED Cylinder Fixtures. Engineered to combine beautiful and powerful lighting with the flexibility of cylindrical fixture lighting. They feature ultra low-glare TIR optics technology and up to 192 product configurations with multiple CCT, power, beam angle, and trim options.



Pipes S & C - Intra Lighting

The simple shape is neutral and widely generic to fit easily anywhere. Thanks to a variety of applications, an uncompromising performance and high efficiency, it has the power to point the attention and to create a special atmosphere in a space.

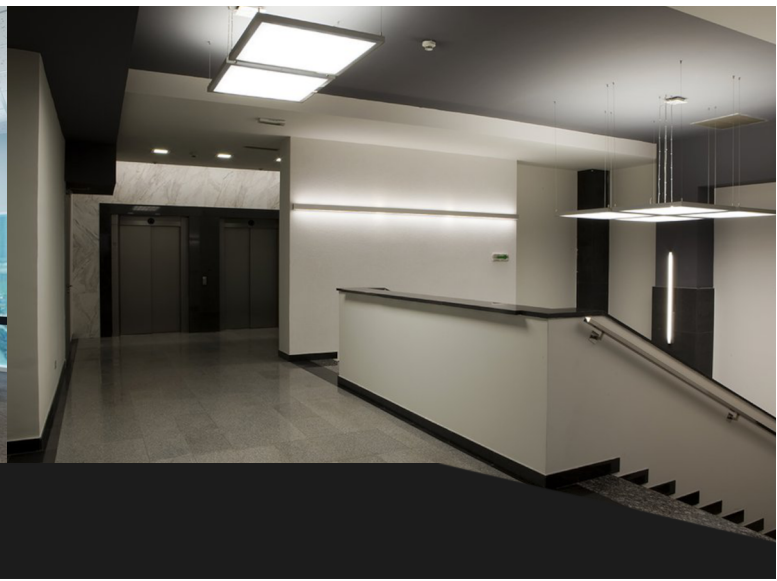

Troffer Lighting




CMF Series - U-Technology

A robust and versatile option for commercial ceiling lighting. The CMF Series is suitable for virtually any project and with up to 324 combinations of size, mounting options and switchable settings, this fixture is one of our most flexible yet. They include convenient onboard switches, advanced back-lit LED technology, and are available in three dynamic sizes for consistent area lighting in projects such as offices, schools, clinics, hospitals, shopping centers and much more.




SILEÄ - PMC Lighting

With the introduction of Sileä, PMC provides a full family of luminaires that offers high-efficiency lighting in a shallow plenum application. Designed for office lighting but equally applicable in lobbies, foyers, conference spaces and break-out facilities, this innovative product family addresses the critical need for quality illumination in the slimmest profile possible.

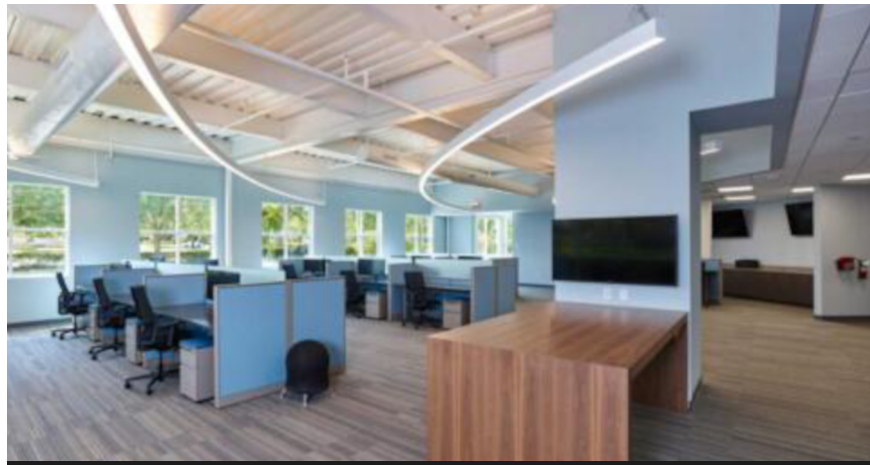

Recessed Linear

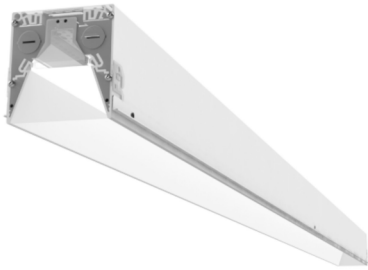

N1R - Mojo Illumination

Rectilinear performance linear product family. Luminous regressed lens cavity offers High Performance optics balancing widespread distribution, precise cutoff and glare control. Integral driver for ease of installation.



ArcX - PMC Lighting

Marrying shape with style and versatility and efficiency. ArcX modules allow construction of a wide variety of system contours and shapes masking each lighting application truly unique.




Linear Pendant / Surface



ArcX - PMC Lighting

Marrying shape and style with versatility and efficiency. ArcX modules allow construction of a wide variety of system contours and shapes making each lighting application truly unique.

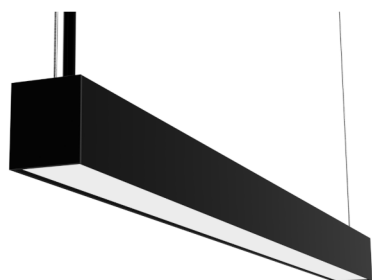

SkyRail Pendant - U-Technology

Powerful, direct-AC luminaires connect together to create endless lengths and patterns for stunning linear lighting with no limits. The aluminum luminaires suspend from the ceiling with high-grade aircraft cables and feature universal input voltage, selectable CCT, and are available in 4 lengths and 3 connectors for endless versatility.




N1S - Mojo Illumination


Rectilinear performance linear product family. Luminous regressed lens cavity offers High Performance optics balancing widespread distribution, precise cutoff and glare control. Integral driver for ease of installation.

OMEGA PRO


Downlight recessed

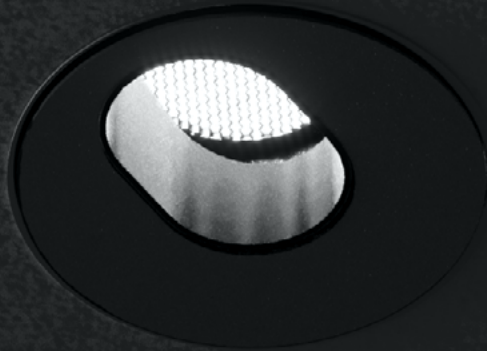

Cross-section dimensions:

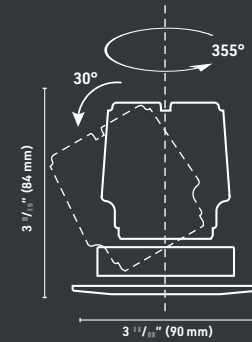

Translating center beam optic allows 0-30° vertical tilt, 355° horizontal rotation.




Discretion doesn't have to mean anonymity. Omega Pro combines style with power. Its vast collection of options allows it to fully integrate with the architecture and offers full control of the lighting effects. Combined with the Casambi™ system, each light output can be controlled separately. A solution adapted to the needs of modern architecture.



FEATURES

- Anti-glare reflector design $UGR \leq 19$
- Available in 6 W (IC rated) and 9 W (requires an IC box to be IC rated)
- Three different beam angle options: 22°, 36° and 60°
- Reproduces the crisp white light of an MR16 halogen lamp
- 50 000 hours lifespan
- High CRI of 90+
- Discreet look and sleek design
- Dimmable with ELV dimming 120V AC or 0/10V dimming 120/277 VAC
- For installation in dry locations only

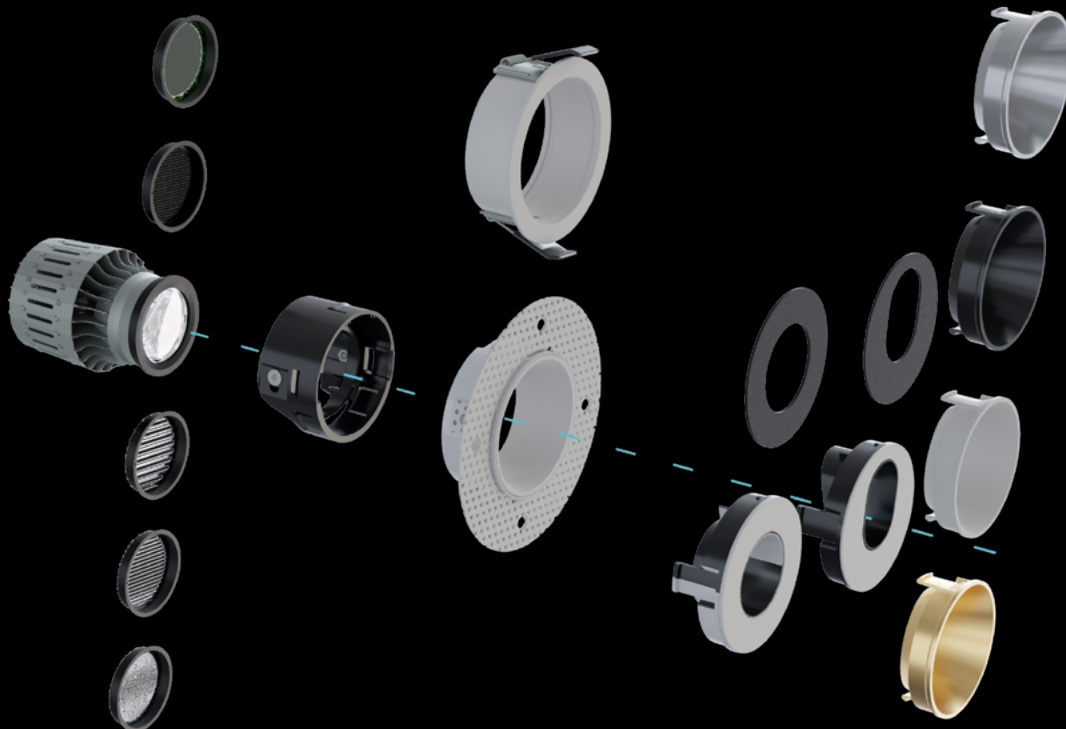

Omega Pro ordering sheet

Recessed downlight








TRIM	SWIVEL	REFLECTOR	FILTER	ACCESSORIES	QUANTITY
 <p>TR - Trimless round</p>  <p>FRT - Fixed round trim</p>	 <p>Adjustable ring 0-30° vrt. 355° hrz.</p> <p>INCLUDED</p>	 <p>WRW - Wide reflector white</p>  <p>WRB - Wide reflector black</p>  <p>WRG - Wide reflector gold</p>  <p>WRS - Wide reflector silver</p>  <p>NROW - Narrow reflector and oval ring white</p>  <p>NROB - Narrow reflector and oval ring Black</p>  <p>NRRW - Narrow reflector and round ring white</p>  <p>NRRB - Narrow reflector and round ring black</p>	 <p>FG - Frosted glass</p>  <p>ST - Striped glass</p>  <p>DG - Diffuser glass</p>  <p>DAG - Double assymetric glass</p>  <p>SAG - Single assymetric glass</p>  <p>LSG - Linear spread glass</p>  <p>HC - Honeycomb</p> <p> NO - No filters</p>	 <p>PF - Plaster frame, new construction</p>  <p>IC - Box IC new construction (Use only with 900 lm 9W)</p> <p> NO - No mounting accessories</p>	 <p>OMEGA PRO</p>



projects@visionz.ca
437-886-9837

- - - -

TRIM REFLECTOR FILTER MOUNTING ACCESSORIES QUANTITY

LUMINOSITY	COLOR TEMPERATURE	BEAM ANGLE	USAGE	POWER SUPPLY
<p>670 - 670 lm (6W) CRI 90+</p> <p>900 - 900 lm (9W)* CRI 90+</p>	<p> 27 - 2700K</p> <p> 30 - 3000K</p> <p> 35 - 3500K</p> <p> 40 - 4000K**</p>	<p> 22 - 22 degrees</p> <p> 36 - 36 degrees</p> <p> 60 - 60 degrees</p>	<p>I - IP22 indoor dry location</p>	<p>B - ELV dimming 120/277V AC</p> <p>D - 0-10V dimming 120/277V AC***</p>
<p><i>*900 lm 9W is not IC rated. May require insulated box (see accessories section).</i></p>	<p><i>**4000K option is available on special order. Delivery times will be longer.</i></p>			<p><i>***0-10V dimming option for 670lm (6W) is available on special order only.</i></p>
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
LUMINOSITY	COLOR TEMPERATURE	BEAM ANGLE	USAGE	POWER SUPPLY


OMEGA

4" Recessed Downlight




Trims dimensions:


RA2 - SA2




RS2



RR2



KT0 - KT1 - KT2



The quality of light of this Series is comparable to that of a halogen lamp offering crisp, directional light which perfectly highlights surroundings. It offers a CRI of 90 and glare-control reflector design.

This small LED module provides higher lumen performance than an LED lamp and is very easy to install. Without the need of a housing, it is installed directly in the ceiling using torsion springs and most models are IC rated. The LED module is fitted with an external dimmable driver. Omega is also offering style, discretion and flexibility with a wide selection of interchangeable trims and accessories.

FEATURES

- Anti-glare reflector design UGR ≤ 19
- Available in 6 W (IC rated) and 9W with three different beam angle options: 22°, 36° and 60°
- Reproduces the crisp white light of an MR16 halogen lamp
- 50 000 hours lifespan
- High CRI of 90
- Discreet look and sleek design
- Dimmable
- For installation in dry locations only. **RS2** (Round shower) is the only trim that can be used in both dry and damp locations.


projects@visionz.ca
437-886-9837



Omega ordering sheet

Recessed downlight

TRIM	LUMINOSITY	COLOR TEMPERATURE	BEAM ANGLE	POWER SUPPLY	ACCESSORIES	QUANTITY
 KIT0 - Kit trimless silver  3 1/2" (80 mm)	670 - 670 lm (6W) CRI 90+ 900 - 900 lm (9W)* CRI 90+	 27 - 2700K  30 - 3000K  35 - 3500K  40 - 4000K**	 22 - 22 degrees  36 - 36 degrees  60 - 60 degrees	B - ELV dimming 120V AC D - 0-10V dimming 120/277V AC	 PF - Plaster frame, new construction  IC - IC Box, new construction (Use only with 900 lm 9W)  NO - No mounting accessories	 OMEGA
 KIT1 - Kit trimless black  3 1/2" (80 mm)	<p><i>*900 lm 9W is not IC rated. May require insulated box (see accessories).</i></p> <p><i>**4000K option is available on special order. Delivery times will be longer.</i></p> <p><i>***0-10V dimming option for 670lm (6W) is available on special order only.</i></p>					
 KIT2 - Kit trimless white  3 1/2" (80 mm)						
 RA2 - Round adjustable white  3 3/4" (95 mm)						
 SA2 - Square adjustable white  3 3/4" (95 mm)						
 RR2 - Round recessed white  3 1/2" (89 mm)						
 RS2 - Round shower white  3" (76.5 mm)						





437-886-9837

visionz.ca