




**VISIONZ**
Of Gypsum




GYPSUM COVES

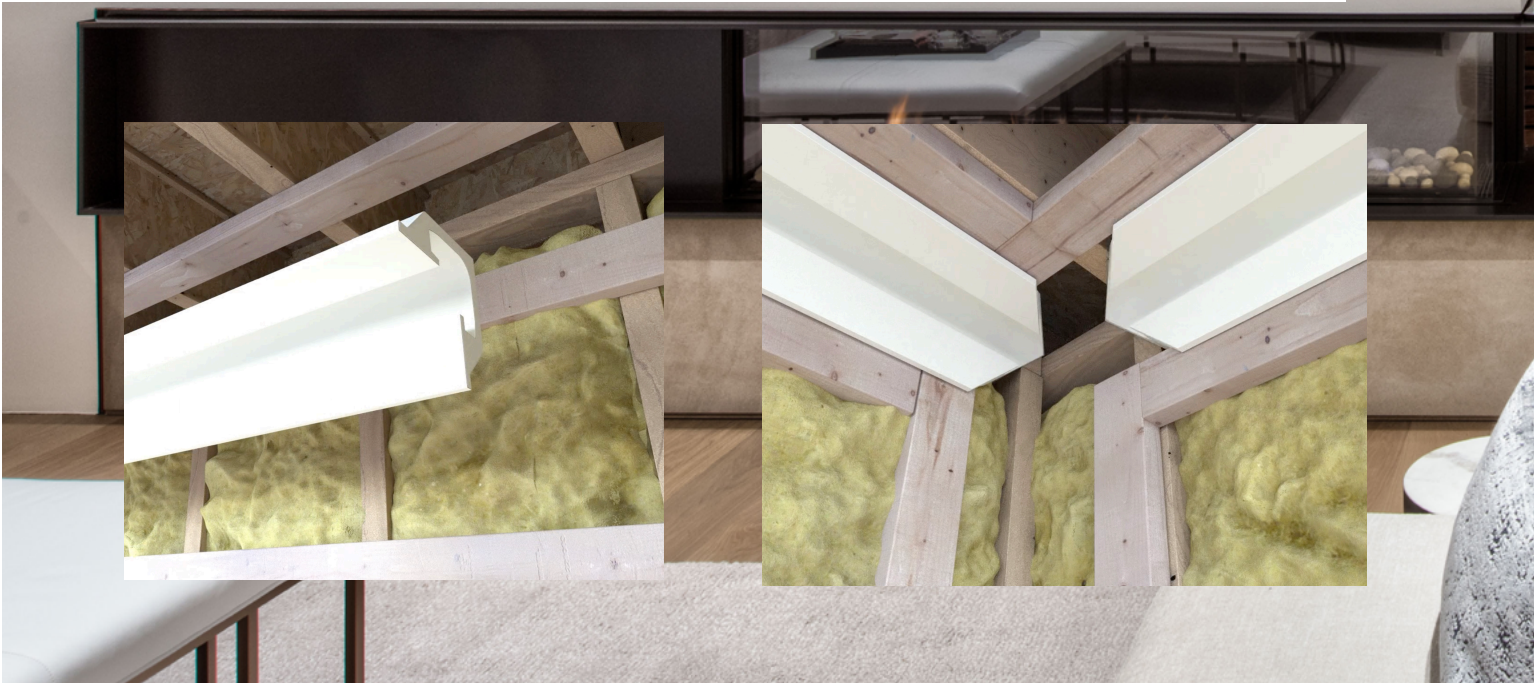



AP SIS

Gypsum Series

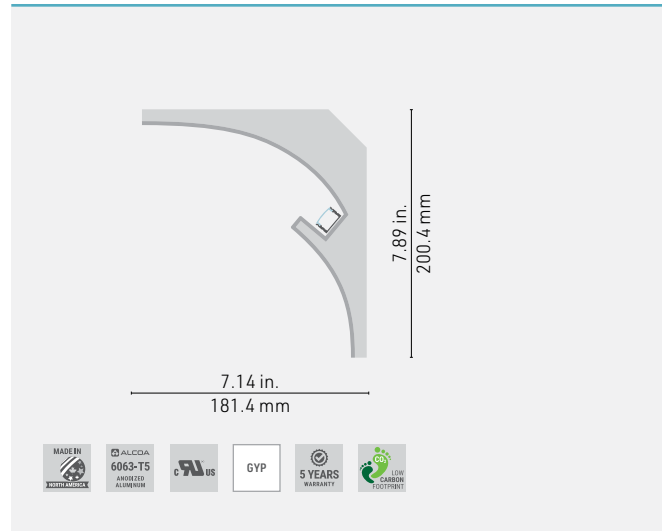

Smooth out those corners with a **rounded light extravaganza!** The AP SIS will go into any corner, whether wall or ceiling, and level out flush with the 1/2" gypsum panels. Prime and paint, mount the aluminum LED profile with your choice of lens, and breathe a brand new life into your interior. As easy as it gets!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.



Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT


0.848 lbs/ft, 1.262 kg/m (without aluminum profile or lens)





ARCUS

Gypsum Series

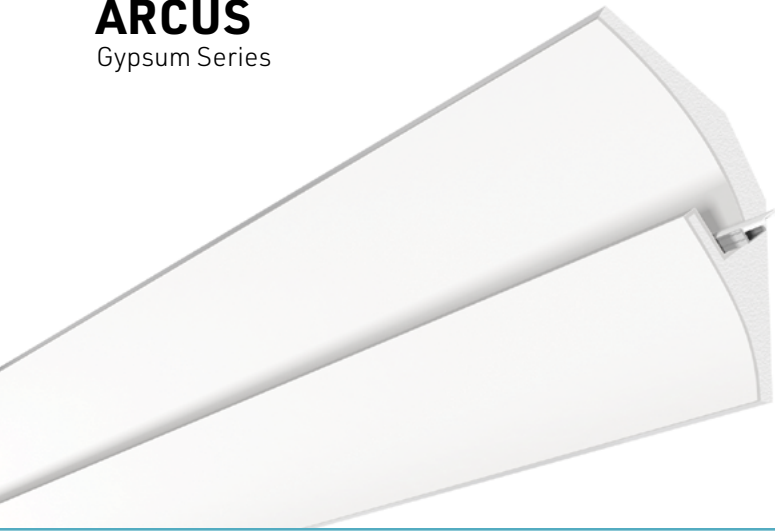


Pitch 7.8:12



The **ARCUS** moulding is designed for slanted surfaces, such as in **attics or cathedral ceiling rooms**. It levels out flush with 1/2" or 5/8" gypsum panels, and contains a recessed LED channel for smooth lighting of the ceiling perimeter. Fits most common slant angles, with room for adjustment using drywall mud. It can be primed and painted like a regular wall surface.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

 Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.



LINEAR WEIGHT

0.856 lbs/ft, 1.275 kg/m (without aluminum profile or lens)



GEMINUS

Gypsum Series

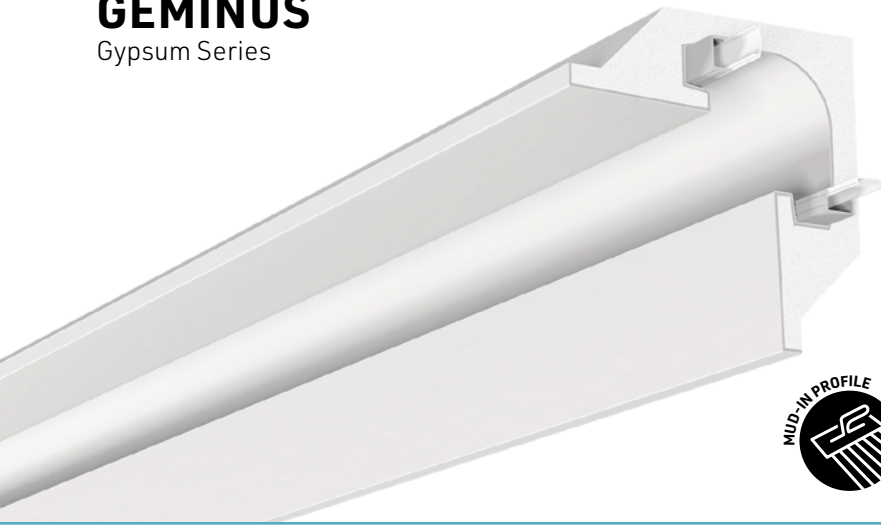

GEMINUS creates **corner alcoves** with a 2-inch wide opening, uniformly lit from both sides, for a **more emphasized linear lighting** effect. A direct fit for 1/2-inch gypsum panels, it can also be leveled with 5/8-inch ones, with the same ease of installation and effectiveness as with other Gypsum Series profiles.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level out to 5/8in. panels with drywall mud and tape, while supporting the edges over 2x1.5in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.



Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.


LINEAR WEIGHT

1.067 lbs/ft, 1.587 kg/m (without aluminum profile or lens)



NIDUS

Gypsum Series

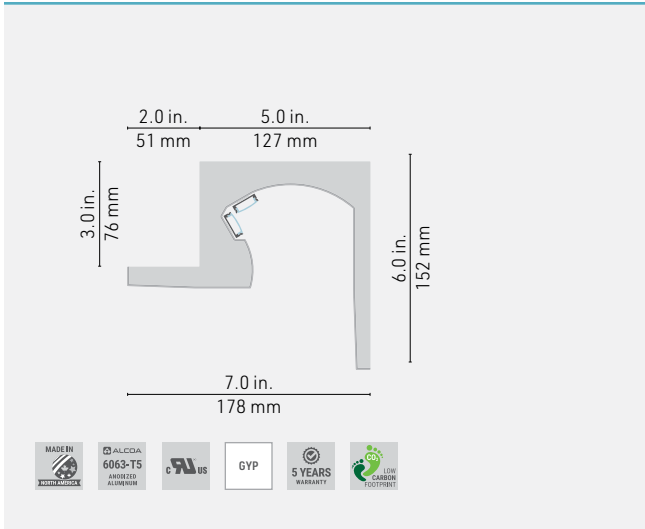

The **NIDUS** profile is an easy and affordable solution for lightgrazing a wall, while keeping the **LED source concealed** and the **corner visually intact**. Install over 2×3in. beams/joists, without the need to build elaborate wood structures, level with the gypsum panels, then mount the LED profile(s) at the position yielding the desired beam direction. Great above blinds or curtains!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2in. gypsum panels, or level out to 5/8in. panels with drywall mud and tape, while supporting the edges over 2x3in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect. The profiles can be installed at one or both of the two available positions.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

 Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.


LINEAR WEIGHT

1.368 lbs/ft, 2.036 kg/m (without aluminum profile or lens)



SULCUS


Gypsum Series

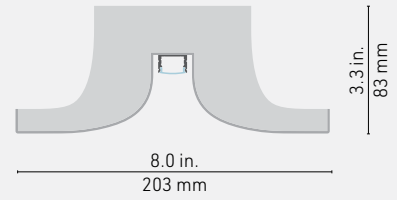

Add **smooth internally lit grooves** to your walls using the SULCUS gypsum profile. It is supported on 2x3in. joists or studs, and will level out flush with 5/8 in. gypsum panels, with a little drywall tape and mud. Paint to match your décor, and enjoy the smooth look as well as the admiration of others!

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 5/8in. gypsum panels, over 2x3in. wall/ceiling beams.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

 Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.


LINEAR WEIGHT

0.702 lbs/ft, 1.044 kg/m (without aluminum profile or lens)

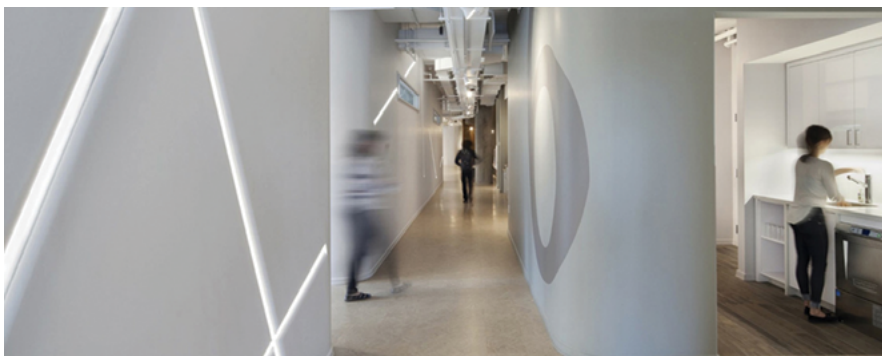

LATUS

Gypsum Series

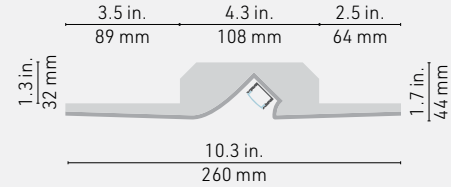

The **LATUS** is an asymmetric recessed LED moulding for drywall, allowing **washing an adjacent surface with light from a 45-degree angle**, from a distance of your choice. The uniform light distribution enhances the appearance of art and displayed items. A direct fit with standard gypsum panels, it needs only a low (1-1/4in.) back clearance, and can be easily installed between smaller beams or joists.

FEATURES

- Shape made of architectural-grade extruded polystyrene foam for stiffness and a high R-factor, exterior surface reinforced with fiberglass for rigidity, finished in white plaster that is primable and paintable like a regular gypsum panel.
- Flush installation with standard 1/2 in. gypsum panels.
- Direct fit for the 1100 and 1200 profiles in ALCOA 6063-T5 aluminum alloy for superior heat dissipation, allowing the use of the full range of 1000 Series lenses, for full control of the lighting effect.
- Designed to give a uniform light without hot spots with series 1200, an opal lens and an LED engine of 120 LEDs per meter or more.
- Application guide for 10mm (3/8-inch) LED engine or less.
- Available only in sections of 8 feet (2.4m). Customer is responsible for cutting.

 Fire Rated Material Type : **NFPA CLASS C**
(tested under ASTM E84. Similar to UL723, ANSI/NFPA No. 255 and UBC No. 8-1)

OPTIONS




LED ENGINE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT

0.637 lbs/ft, 0.947 kg/m (without aluminum profile or lens)

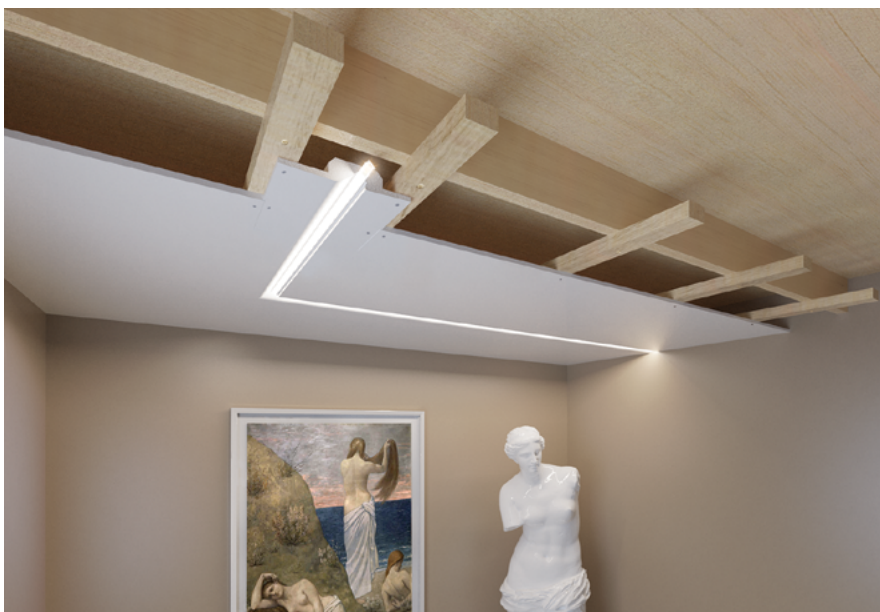




GYPSUM GROOVES




G1400


Gypsum Series

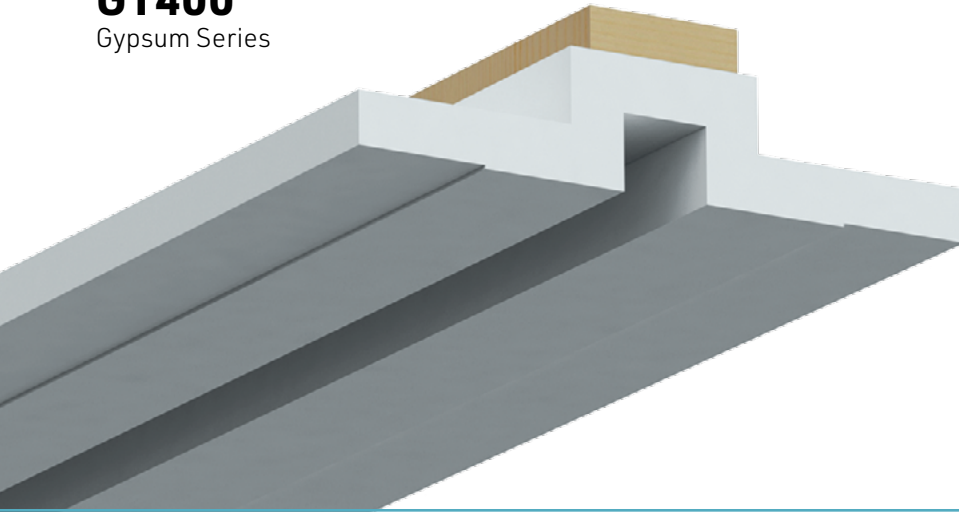

5/8"

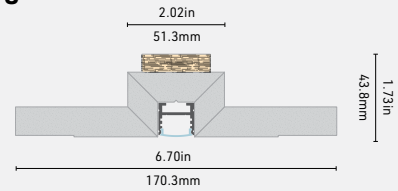

1/2"

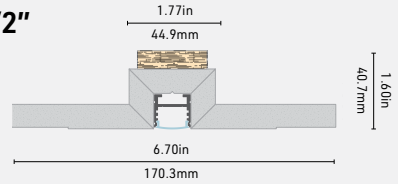


Combining drywall panels with our 1400 series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Model compatible with 1400 series
- Panel thickness 1/2 and 5/8 inch allow for flush installation with standard 1/2 and 5/8 inch gypsum panels
- Shipped in straight sections of 4 feet (1.22m)
- 8 feet sections available for special order*



installation video

* For special orders pricing and shipping contact your sales representative.

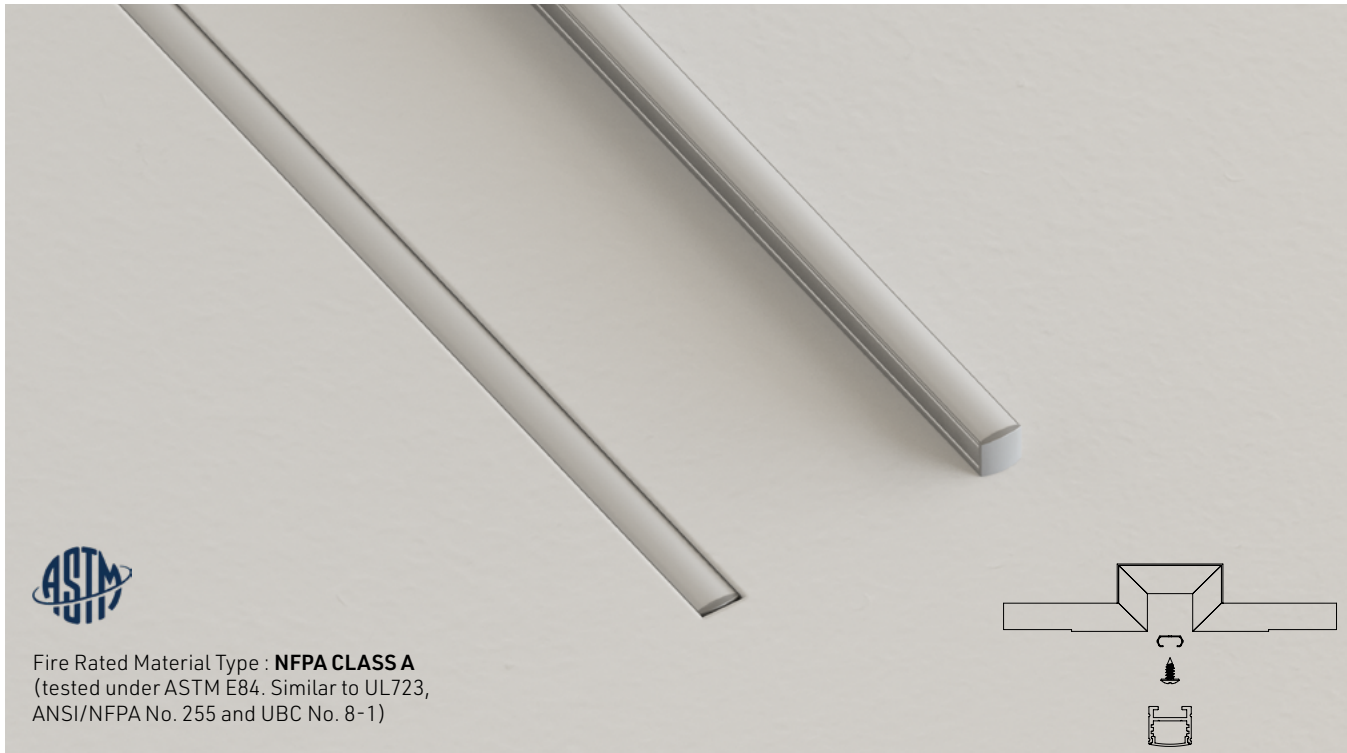


Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)




G1450


Gypsum Series

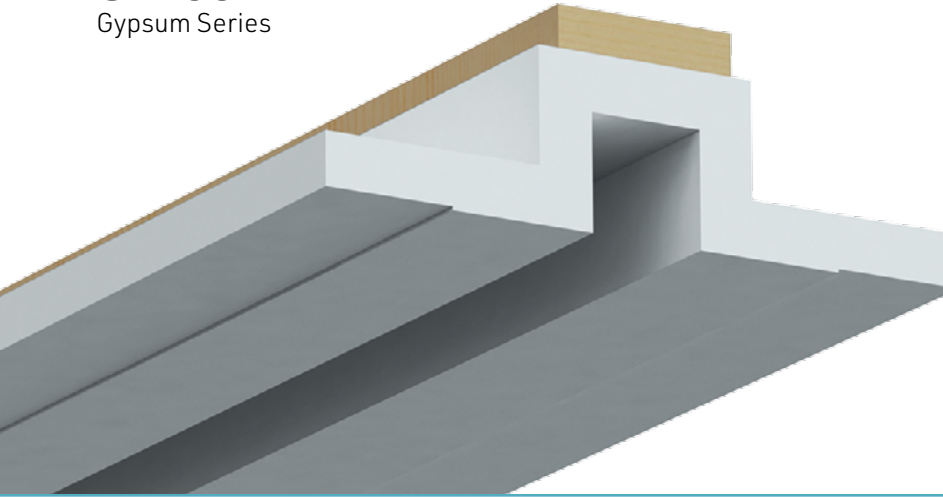

5/8"

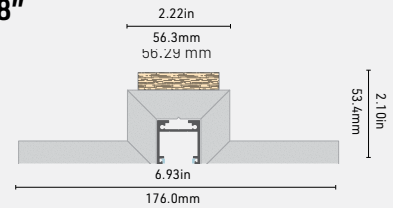

1/2"

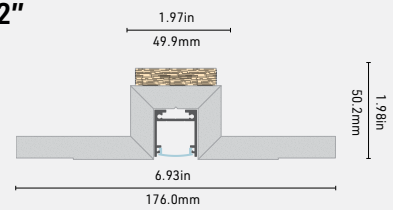

Combining drywall panels with our 1450 series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Model compatible with 1450 series
- Panel thickness 1/2 and 5/8 inch allow for flush installation with standard 1/2 and 5/8 inch gypsum panels
- Shipped in straight sections of 4 feet (1.22m)
- 8 feet sections available for special order*



installation video


* For special orders pricing and shipping contact your sales representative.

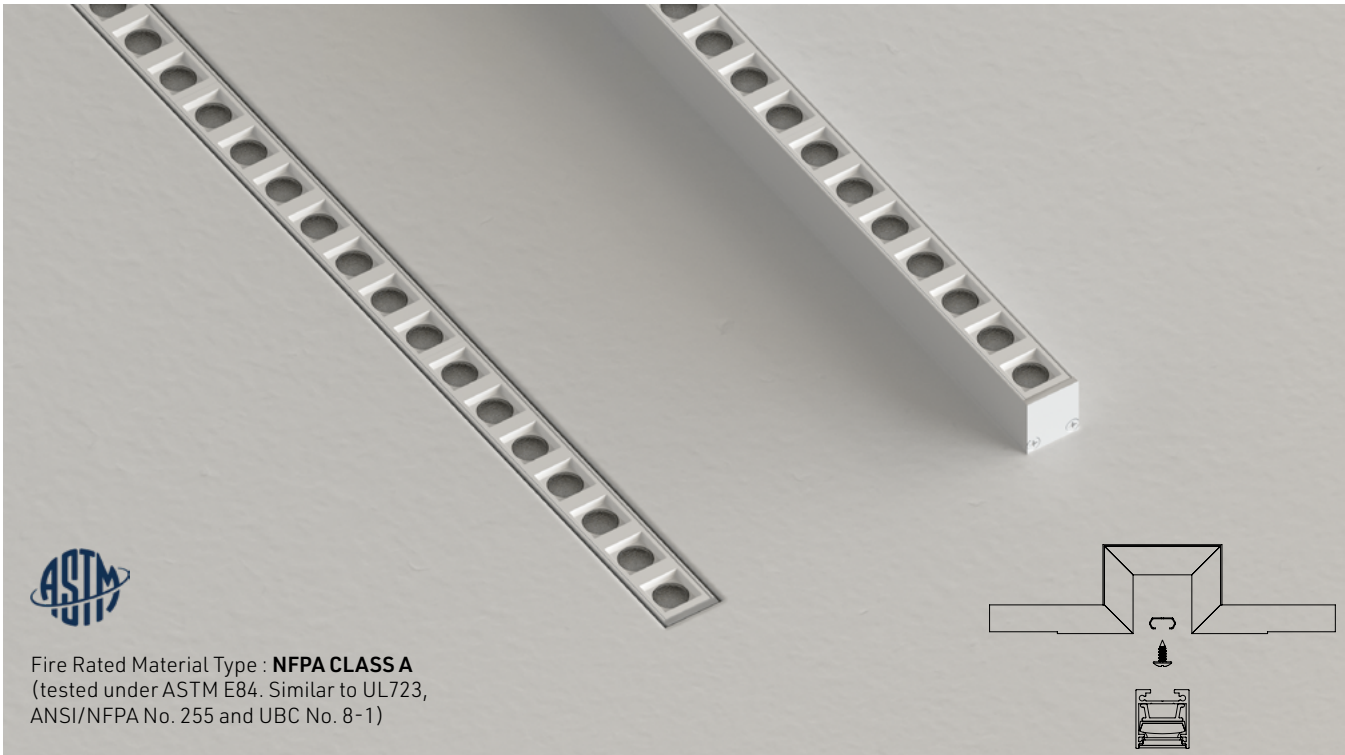


Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)

G4450


Gypsum Series

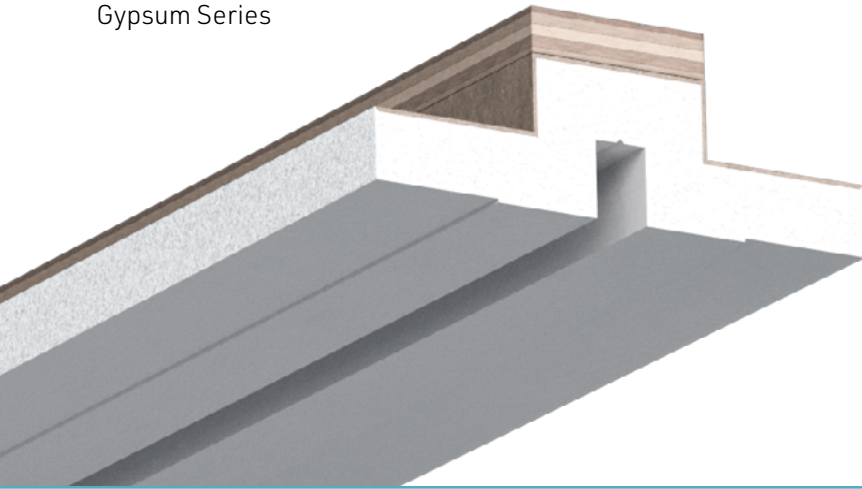

5/8"



1/2"




Combining drywall panels with our 4450 series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Model compatible with 4450 series
- Panel thickness 1/2 and 5/8 inch allow for flush installation with standard 1/2 and 5/8 inch gypsum panels
- Shipped in straight sections of 4 feet (1.22m)
- 8 feet sections available for special order*




installation video

* For special orders pricing and shipping contact your sales representative.

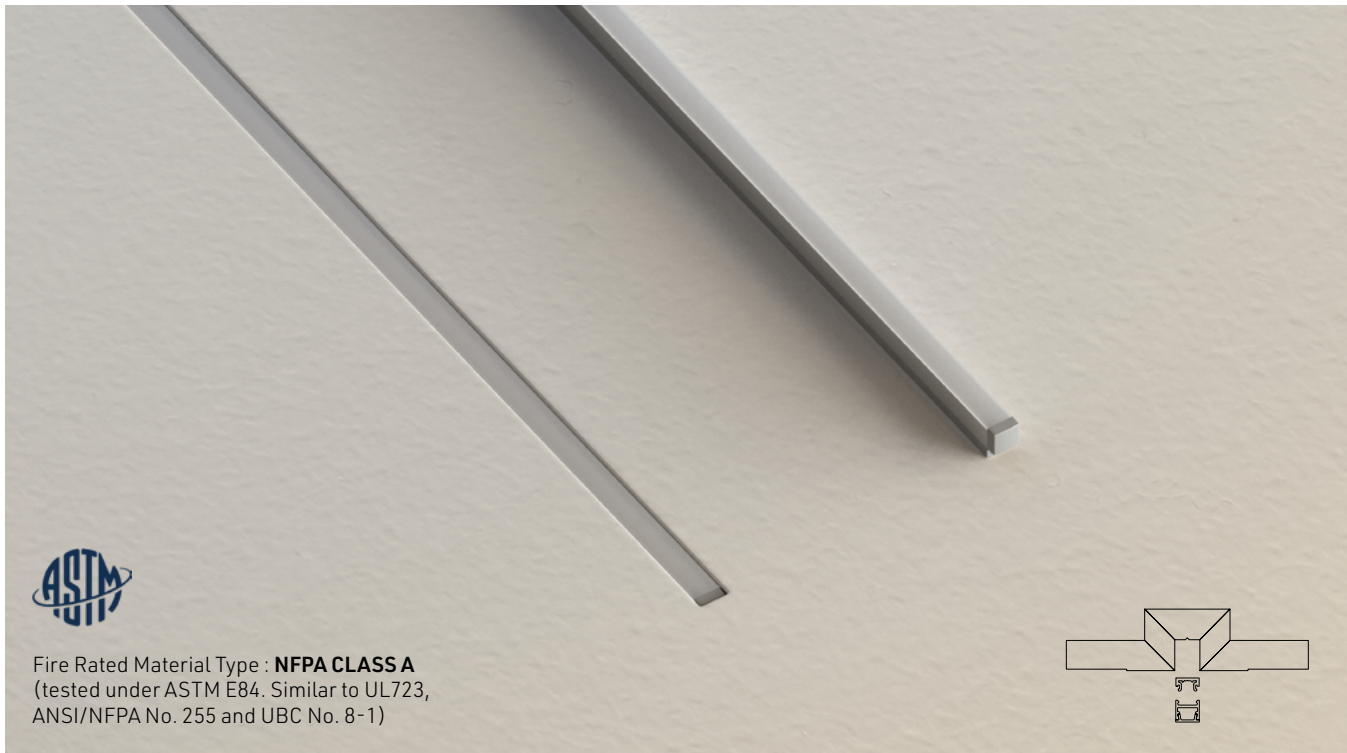


Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)






G8800


Gypsum Series

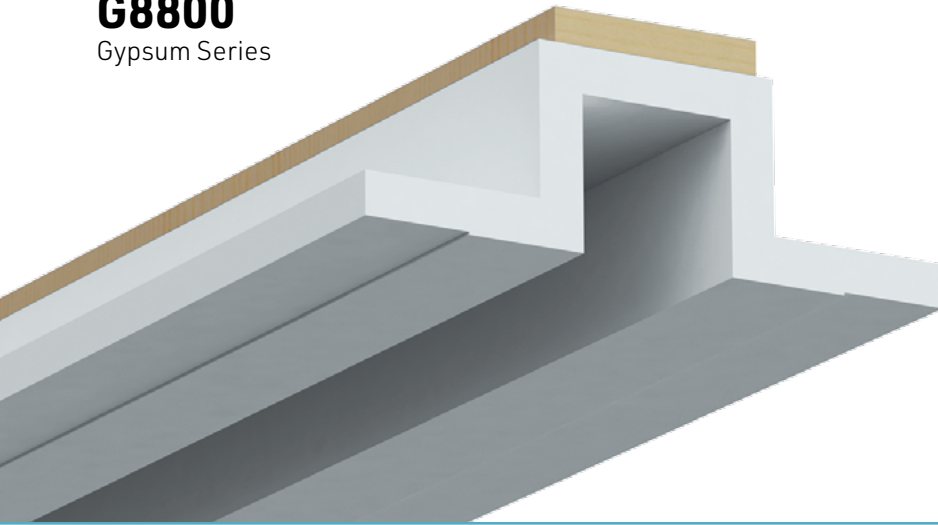

5/8"

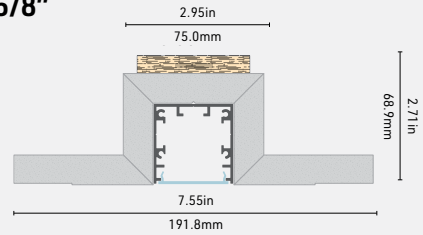

1/2"

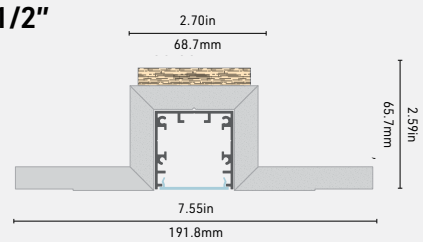


Combining drywall panels with our 8800 series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Model compatible with 8800 series
- Panel thickness 1/2 and 5/8 inch allow for flush installation with standard 1/2 and 5/8 inch gypsum panels
- Shipped in straight sections of 4 feet (1.22m)
- 8 feet sections available for special order*



installation video


* For special orders pricing and shipping contact your sales representative.

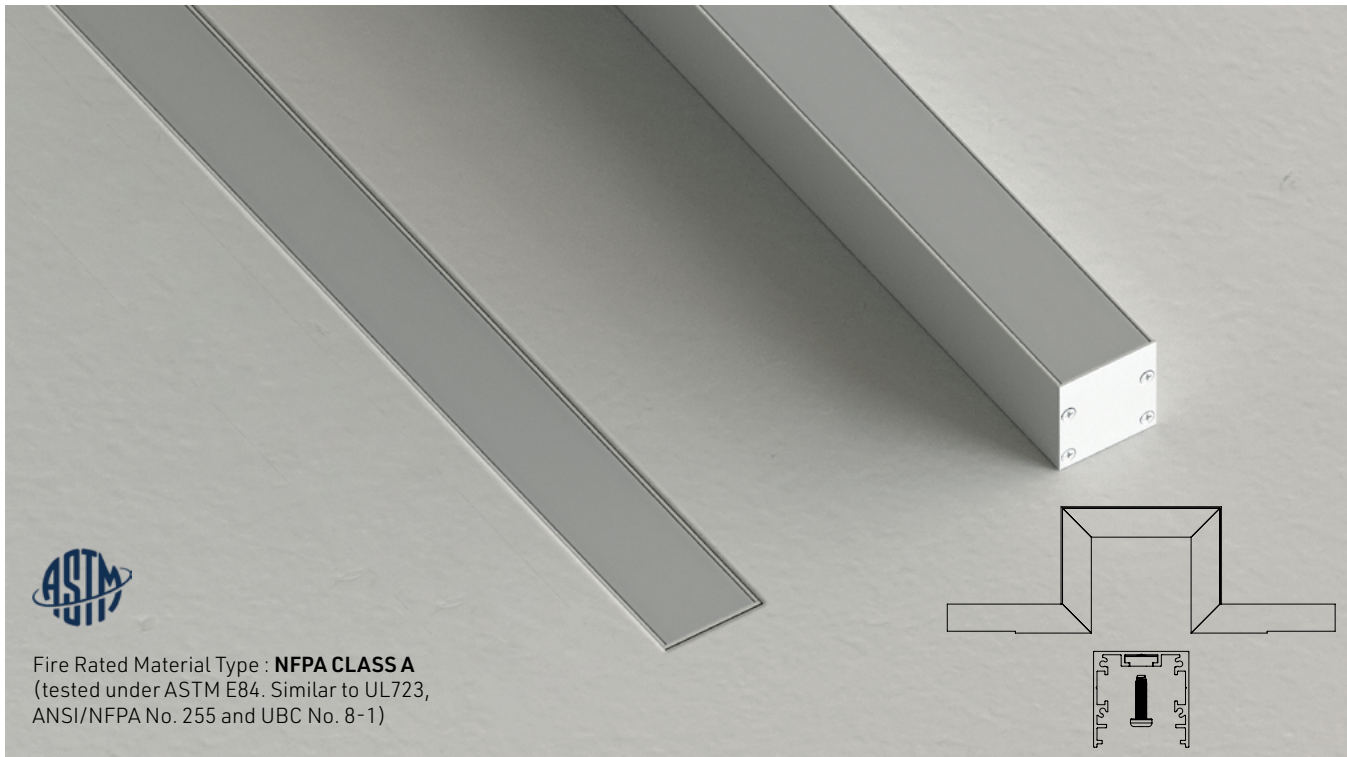


Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)

G9850


Gypsum Series

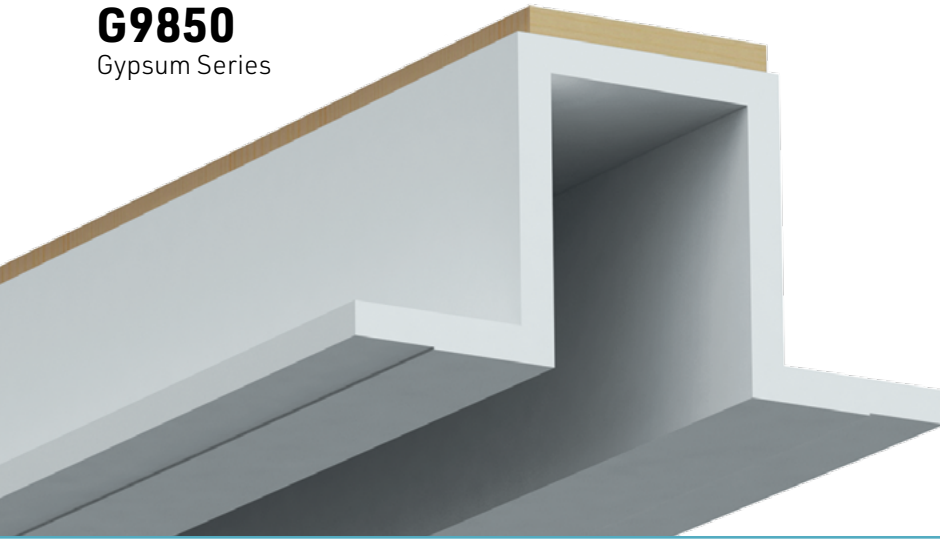

5/8"

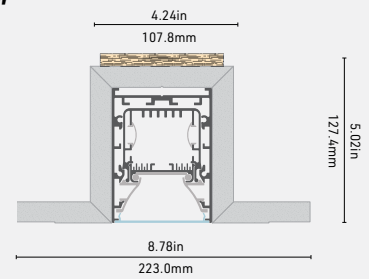

1/2"

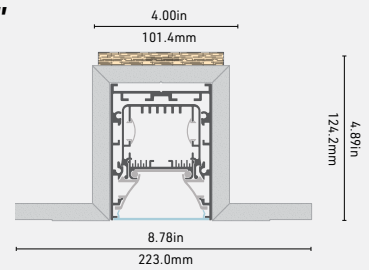


Combining drywall panels with our 9850 series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.


FEATURES

- Class A fire protection grade material
- Model compatible with 9850 series
- Panel thickness 1/2 and 5/8 inch allow for flush installation with standard 1/2 and 5/8 inch gypsum panels
- Shipped in straight sections of 4 feet (1.22m)
- 8 feet sections available for special order*



installation video




* For special orders pricing and shipping contact your sales representative.

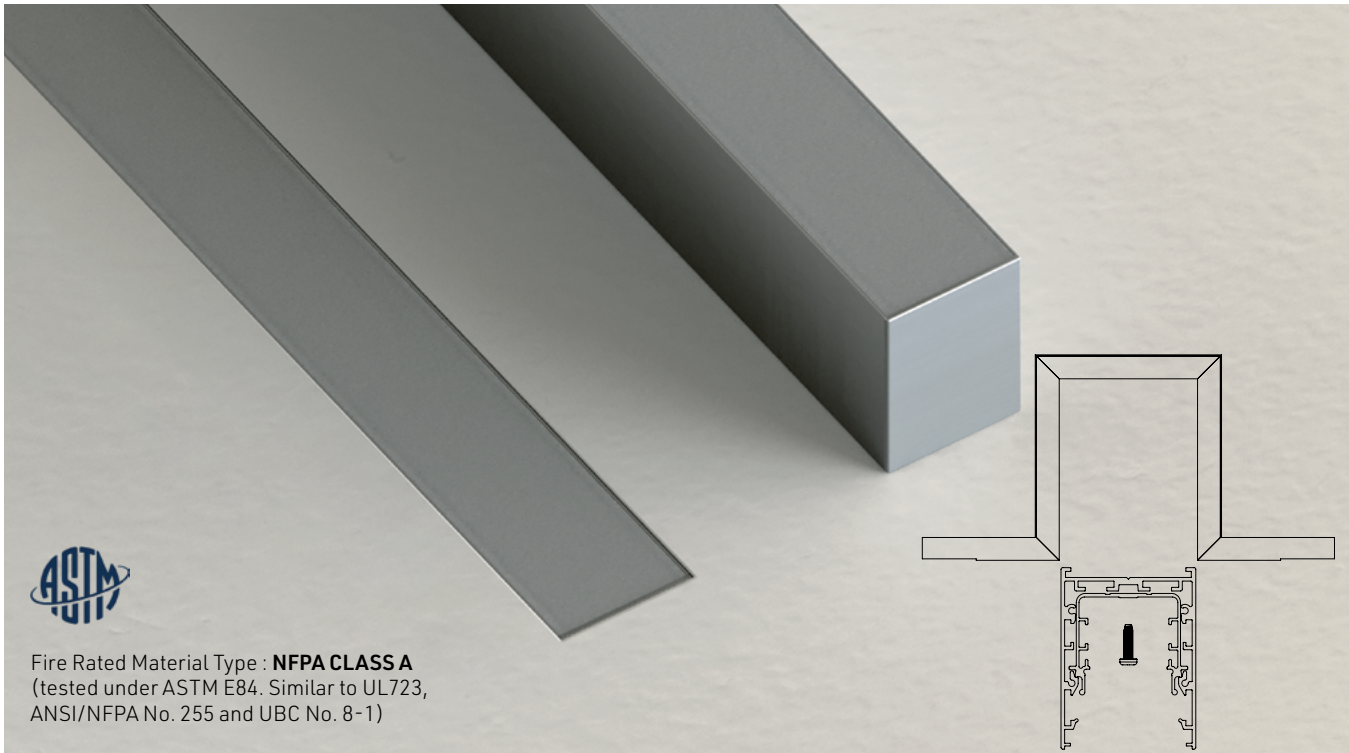

Fire Rated Material Type : **NFPA CLASS A**
(tested under ASTM E84. Similar to UL723,
ANSI/NFPA No. 255 and UBC No. 8-1)

GTRAXX

Gypsum Series

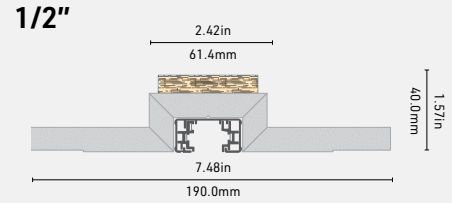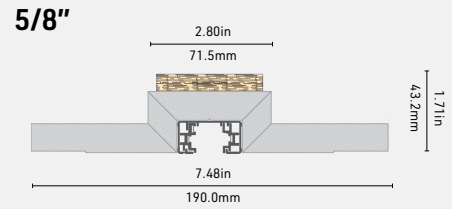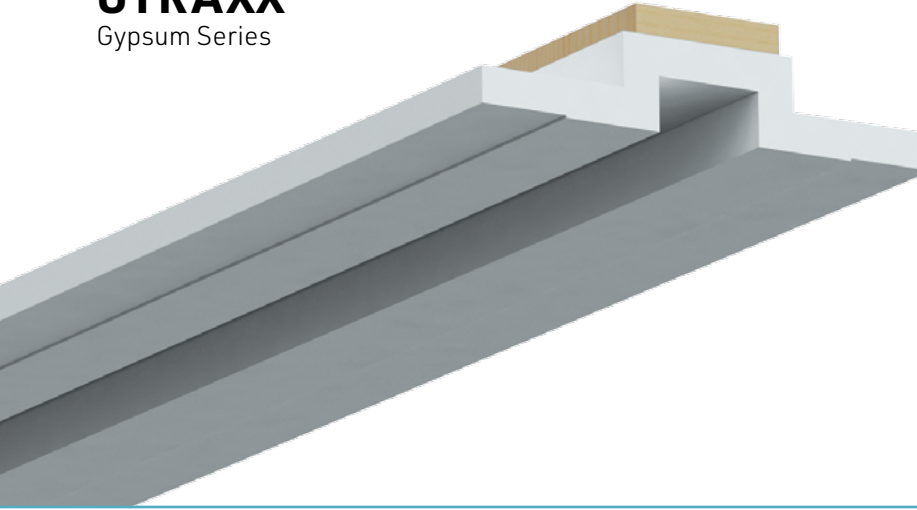



Combining drywall panels with our TRAXX series, the **Gypsum Groove** system allows you to create functional and inconspicuous light sources embedded into a drywall surface. Fully integrated architectural lighting system permits to create outstanding illumination while preserving clean minimalist look.

The **Gypsum Groove** meets the industry's most stringent fire protection requirements. Certified Class A by the International Building Code, this system is ideal for commercial and institutional buildings.







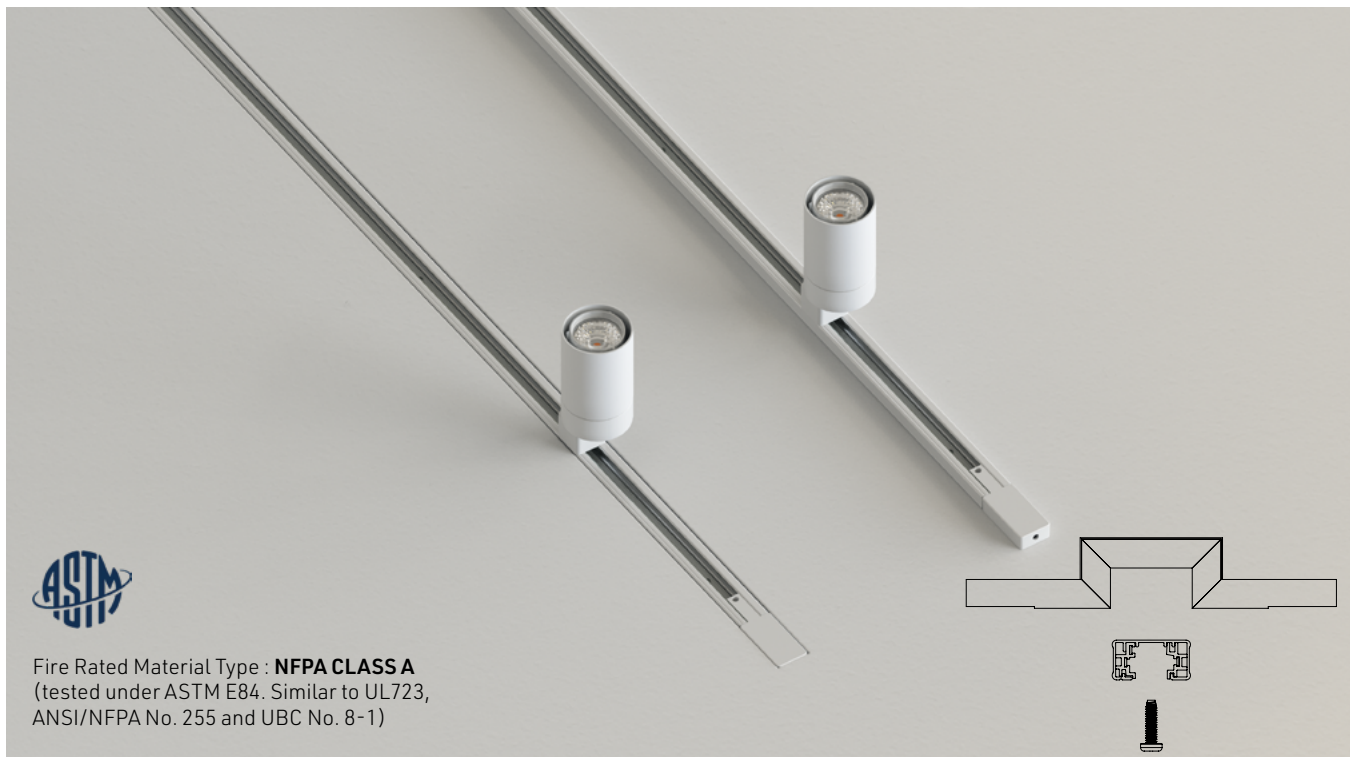

















FEATURES

- Class A fire protection grade material
- Model compatible with TRAXX series
- Panel thickness 1/2in allows for flush installation with standard 1/2in. gypsum panels, or level with drywall mud to match seamlessly with 5/8in. panels.
- 5/8in thick panels available for special order*.
- Shipped in straight sections of 4 feet (1.22m).
- 8 feet sections available for special order*.

* For special orders pricing and shipping contact your sales representative.





  <p><input type="checkbox"/> Apsis</p>	  <p><input type="checkbox"/> Arcus</p>	  <p><input type="checkbox"/> Geminus</p>	  <p><input type="checkbox"/> Latus</p>
  <p><input type="checkbox"/> Nidus</p>	  <p><input type="checkbox"/> Sulcus</p>	  <p><input type="checkbox"/> G1400</p>	  <p><input type="checkbox"/> G1450</p>
  <p><input type="checkbox"/> G4450</p>	  <p><input type="checkbox"/> G8800</p>	  <p><input type="checkbox"/> G9850</p>	  <p><input type="checkbox"/> GTraxx</p>



visionz.ca 437-886-9837 projects@visionz.ca